

MICROPACK
FIRE & GAS

FDS300

INTELLIGENT VISUAL FLAME DETECTOR

DATA SHEET



Designed for hazardous industries where a high-quality, lower cost, long range flame detector is needed .

The MICROPACK FDS300 is an explosion proof intelligent visual flame detector (iVFD) capable of detecting an n-heptane fire at 60 metres and JP4 at 90 m.

The device processes live video images to detect the characteristic properties of flames by means of onboard digital signal processing and hardcoded software algorithms.

Features and Benefits

The FDS300 utilises flame detection algorithms that have been refined over 30 years from the FDS101 through to the market leading FDS301 .

Excellent Immunity to False Alarms

The FDS300 consistently demonstrates excellent immunity to false alarms in areas where flare reflections and / or hot CO2 emissions may cause other technologies to false alarm.

No sensitivity loss

The FDS300 has been independently tested to show no sensitivity loss to a fire in the presence of modulated sunlight and modulated black body heat. This key feature means the unit has greater coverage than almost all other detectors in "real world" outdoor conditions.

Extended field of view


The FDS300 has a massive 120° horizontal and 80° vertical field of view and unlike conventional flame detectors, the field of view does not reduce at the outer limits.

This means one unit covers more area than its conventional flame detector counterpart.

- Intelligent visual flame detection (iVFD) principle ensures maximum false alarm immunity and eliminates sensitivity loss in the presence of modulated sunlight and black body heat.
- Continuous optical test, without a reflector
 - Verifies operation and improves device up-time
- International hazardous area approvals
 - FM / ATEX / IEC Ex
- Certified performance testing to multiple fuels
 - FM 3260
- Spatially aware—single sensitivity detection
- External testing with a long-range flame simulator
 - Minimises the need for scaffolding
- Easy integration using industry standard outputs:
 - Alarm and Fault Relays
 - 0-20mA
- Worldwide marine approvals



micropackfireandgas.com



TECHNICAL SPECIFICATION

Environmental

Operating Temp -60°C to +85°C (-76°F to +185°F)
Storage Temp -60°C to +85°C (-76°F to +185°F)
Humidity 0 to 95% RH non-condensing

Operating Voltage

24 Vdc Nominal – (Range 18 to 32 Vdc)

Power Consumption

2.8 W Nominal at 24 Vdc

Speed of Response

<7 seconds (Typical)


Flame Sensitivity

Fuel	Fire Size	Distance
n-Heptane pan fire	30cm x 30cm / 1'x1'	60m (200 feet)
n-Heptane: direct sunlight	30cm x 30cm / 1'x1'	60m (200 feet)
n-Heptane: modulated sunlight	30cm x 30cm / 1'x1'	60m (200 feet)
n-Heptane: modulated black body	30cm x 30cm / 1'x1'	60m (200 feet)
n-Heptane: Arc welding	30cm x 30cm / 1'x1'	60m (200 feet)
n-Heptane: 1000 W lamp	30cm x 30cm / 1'x1'	60m (200 feet)
Ethanol	30cm x 30cm / 1'x1'	30m (100 feet)
Methane	90 cm / 36" plume	26m (86 feet)
Gasoline	30cm x 30cm / 1'x1'	60m (200 feet)
JP4	60cm x 60cm / 2'x2'	90m (300 feet)
Ethylene Glycol	30cm x 30cm / 1'x1'	20m (65 feet)
Diesel	30cm x 30cm / 1'x1'	40m (130 feet)
Crude oil (heavy fuel)	0.5mx0.5m 20"x20"	50m (165 feet)
Silane	60 cm / 24" plume'	17m (56 feet)

Enclosure

Material: Copper free aluminium or 316 stainless steel
Entry size: M25 or 3/4 inch NPT
Weight: Aluminium 2.5 Kg (5.5 lbs)
Stainless steel 6 Kg (13.2 lbs)

Field of View

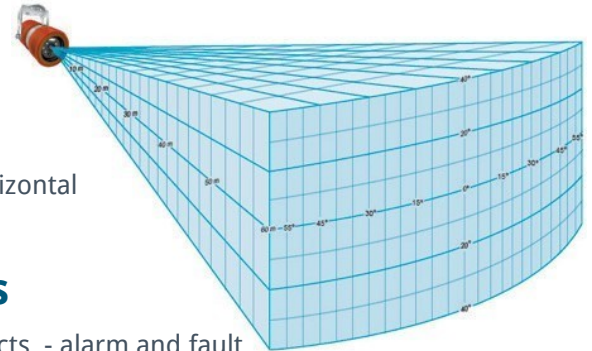

80° vertical
by 120° horizontal

Outputs

Relay contacts - alarm and fault
0-20mA (current source)

Certification

FM approved
Class 1 Div 1, Groups B, C, D T4
Class 1 Zone 1 AEx/Ex d IIC T4



ATEX  II 2 G Ex db IIC T4
IECEx Ex db IIC T4



Performance approval to FM 3260

Ingress IP66 / NEMA type 4X

DNV GL Marine Type Approval

Accessories

Flame simulator (FS30x)
Pole mount bracket
Retrofit mounting bracket
Marine mounting bracket

